


# KOHLER®

## INSTALLATION INSTRUCTIONS

## IV GEORGES BRASS™ FREE STANDING BATH FITTING K-6905

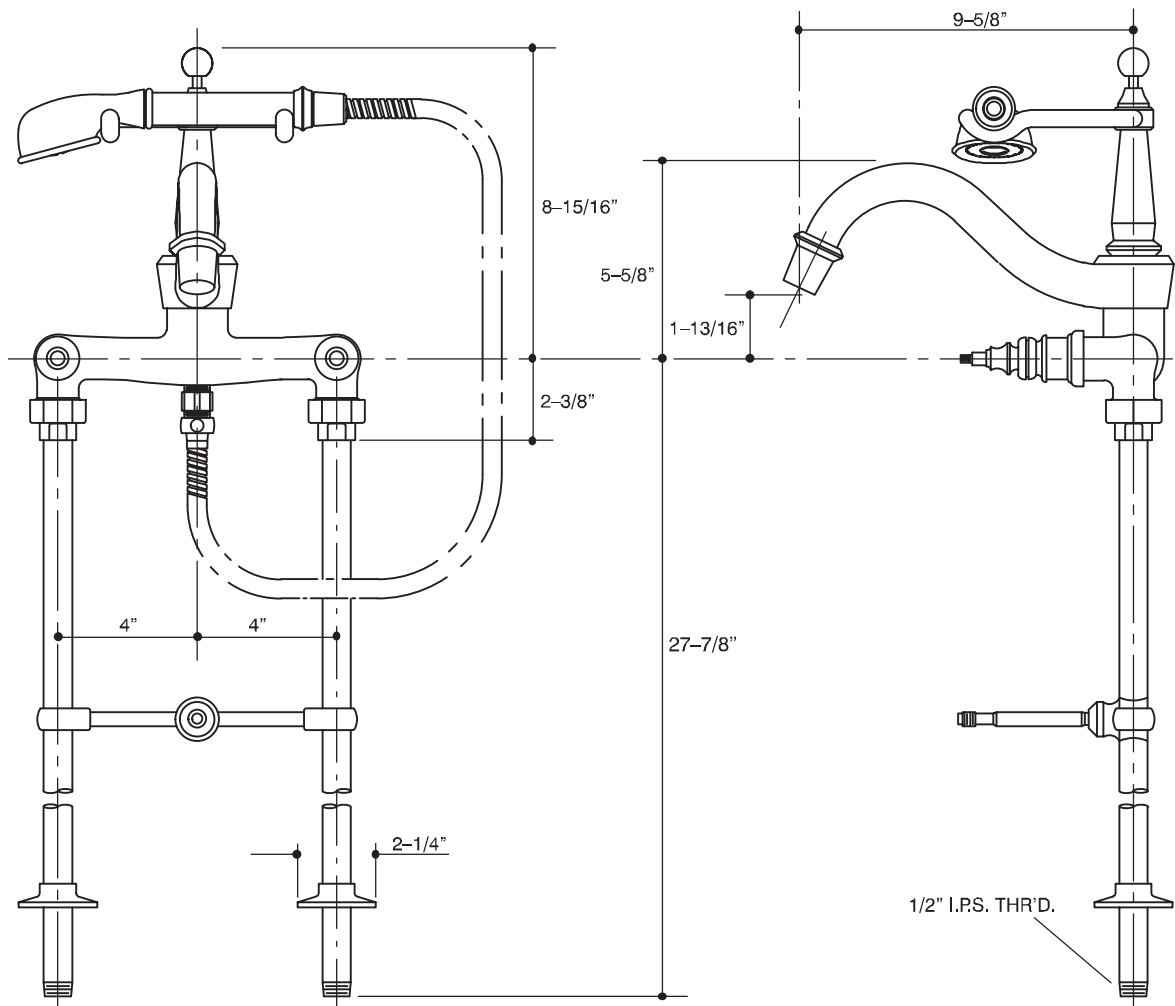

## SPECIFICATIONS

Riser tubes for deck-mount . . . . . K-126  
Riser tubes for Birthday Bath . . . . . K-127  
Riser tubes for Vintage free-standing bath . . . . . K-128

## NOTES

Spray hose length = 76"

Add water hammer suppressors when installing water service for this bath fitting.

**PLEASE LEAVE THESE INSTRUCTIONS WITH THE CONSUMER AS THEY CONTAIN IMPORTANT CARE, CLEANING, AND WARRANTY INFORMATION.**

## BEFORE YOU BEGIN:

- Observe all local plumbing and building codes.
- Shut off hot and cold water supplies.
- Inspect waste and supply tubing; replace if necessary.

FOR REPLACEMENT INSTALLATIONS: Place a protective covering over bath. Remove old faucet. Install hot and cold piping. Additional piping or adapters may be necessary to conform to proper requirements.

## REQUIRED TOOLS & MATERIALS:


- Adjustable wrench
- Adjustable arc pliers
- Hacksaw
- Strap
- Pliers
- Screwdrivers
- 3/8" hex head wrench
- Thread sealant

## OPTIONAL TOOLS & MATERIALS:


- 1/2" piping
- Threaded 1/2" adapters
- 1/2" union elbows
- Shower/bath ells

## TROUBLESHOOTING:


Run hot and cold water through faucet and hand shower to remove debris. Check for leaks.

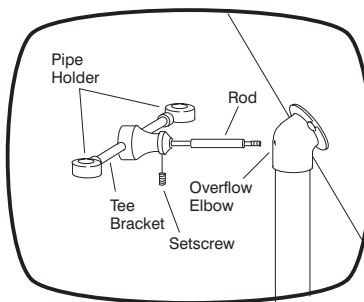


- 1** FREE-STANDING INSTALLATION: Remove temporary plugs from water supply couplings. Thread tee bracket into hole at back of overflow elbow. Loosen setscrew in tee bracket to align pipe holders with hot and cold supply roughing-in. Riser tubes should extend approximately 1 -1/2" into floor.

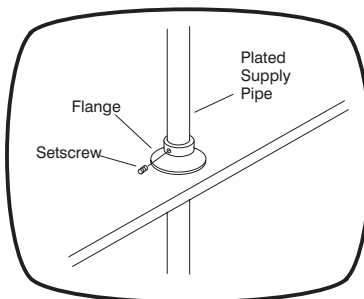



- 4** DECK-MOUNTED INSTALLATION: Loosen setscrew in flange and slide flange down from top of supply pipe to rest on deck.

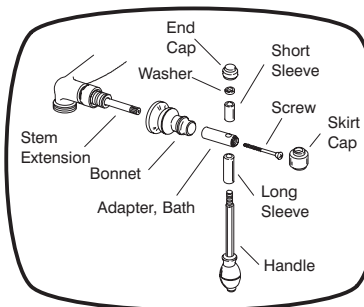


- 7** Place stem extension onto valve stem. Thread stem bonnet to valve body. Slide packing over stem extension. Thread packing nut to stem bonnet. Place bonnet over stem extension. With valves turned off, align adapter over stem extension. Secure with screw. Assemble screw cover to skirt. Place long sleeve over handle arm. Insert handle arm through skirt cover and adapter as shown. Place short sleeve over handle arm and screw on end cap. NOTE: Adapter can be removed and rotated to provide proper handle alignment.

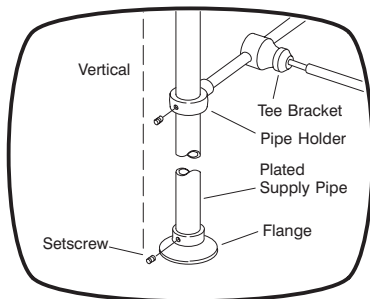


**2 FREE-STANDING INSTALLATION:** Loosen set screws in pipe holder and flange. Carefully slide plated supply pipe through pipe holder and flange. Fit supply pipe into water supply roughing-in and tighten using a strap wrench. Tighten set screws in pipe holder and flange. Repeat procedure for second supply pipe.

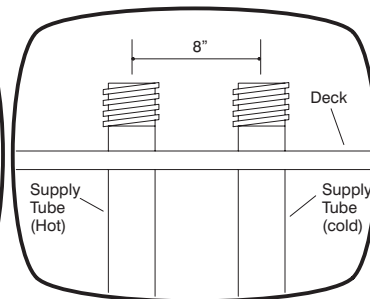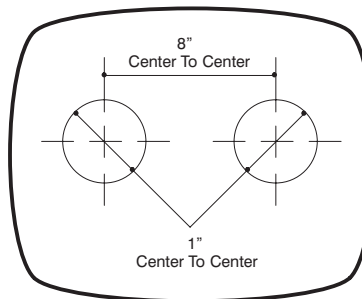

**3 DECK-MOUNTED INSTALLATION:** Remove temporary plugs from water supply couplings. Construct a frame for deck with two 1" diameter holes measuring 8" apart from center to center. Slide plated supply pipes through holes and connect to bath roughing-in previously installed. NOTE: ENSURE SUPPLY PIPES ARE SECURELY STRAPPED TO FRAMING BELOW DECK.

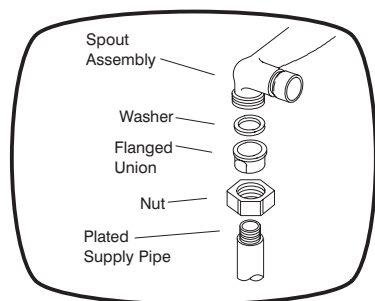

**5 FREE-STANDING AND DECK-MOUNTED INSTALLATION:** Place nut onto plated supply pipe being careful not to scratch pipe. Screw union onto top of supply pipe, checking to ensure top of flanged union is level. Set washer on top of union and connect to spout assembly. Repeat procedure for second supply pipe. Tighten nuts.

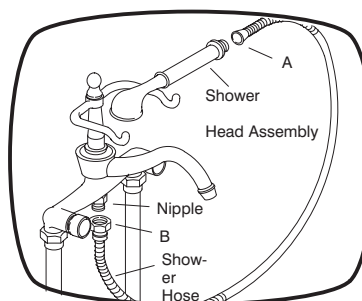

**6** Thread hex-connection end of shower hose (section B) onto nipple. Connect opposite end of shower hose (section A) to shower head assembly.

## IMPORTANT CONSUMER INFORMATION

Please take a moment to familiarize yourself with the Kohler Warranty, its benefits, and limitations. Kohler Co. and its distributors support you with one of the largest Service Networks of its type. Here's what you need to do if you require service:

**FIRST:** Contact the dealer or contractor who sold and installed the product. They should be able to solve any problems you may have.

**SECOND:** If your dealer or contractor cannot solve the problem, they will contact or supply you with the name of the local Kohler Distributor and the:



KOHLER TECHNICAL SPECIALIST

**THIRD:** If you are unable to obtain warranty service through either your contractor or Kohler Co. distributor, please write us directly at the address below.

**FOURTH:** Include all pertinent information regarding your claim, including a complete description of the product, model numbers, colors, finishes, and the date the product was installed. Include a description of the problem, and a photocopy of your invoice for the products involved. Also give us the name of the contractor and distributor.

Kohler Co. Consumer Affairs Kohler, Wisconsin 53044

### LIMITED ONE-YEAR WARRANTY

Kohler plumbing fixtures and fittings are warranted free of manufacturing defects.

Kohler Co. will, at its election repair, replace, or make appropriate adjustment where Kohler Co. inspection disclosed any such defects occurring in normal usage within one year after installation. **Kohler Co. is not responsible for installation costs.**

To obtain warranty service, contact Kohler Co. either through your Dealer or Plumbing Contractor or by writing Kohler Co., Attn: Consumer Affairs Department, Kohler, WI 53044 U.S.A.

**IMPLIED WARRANTIES, INCLUDING THAT OF MERCHANTABILITY, ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. KOHLER CO. DISCLAIMS ANY RESPONSIBILITY FOR CONSEQUENTIAL DAMAGES.**

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so this limitation and exclusion may not apply to you. This warranty gives you specific legal rights. You may also have rights which vary from state to state.

This is our exclusive written warranty.

KOHLER CO., KOHLER, WISCONSIN 53044

### CARE AND CLEANING FOR YOUR NEW KOHLER FAUCET

**CHROME PLATED FAUCETS.** Your attractive chrome finished faucets will remain sparkling if you clean them with a damp sponge and buff dry to restore their gleam. In hard water areas you may use the following cleaners, but remember, they must be rinsed off immediately.

- NEW SPIC AND SPAN
- MR. CLEAN w/Soft Abrasive
- GLASS PLUS
- Dow Bathroom
- LYSOL Pine Action
- TOP JOB
- Lysol Deodorizing
- MR. CLEAN All-Purpose
- LIME-A-WAY Bath & Kitchen
- LYSOL Direct Multi-Purpose
- FANTASTIK All-Purpose
- PINE MAGIC Multi-Purpose


- FANTASTIK Bathroom
- LYSOL Basin, Tub & Tile
- PINE POWER

**POLISHED BRASS, BRUSHED NICKEL, GOLD, AND COLORED FAUCETS.** Clean these faucets with a mild soap and warm water. Wipe entire faucet completely dry with a clean, soft cloth. Many cleaners may contain chemicals, such as ammonia, which could adversely affect the finish and are not recommended for cleaning.

DO NOT USE ABRASIVE CLEANERS OR SOLVENTS ON KOHLER FAUCETS.

**NOTE:** Part numbers listed refer to service parts and may not correspond to production part numbers packed with fitting. Order by service part number only.

ITEM NO.	PART NO.	DESCRIPTION
1	50589	Knob
2	50562	Bonnet
3	50563	Nut
4	50560	Hand Shower Cradle
5	50588	Diverter Body Assembly
6	34264	O-Ring
7	34300	O-Ring
8	51679	O-Ring
9	50568	Washer
10	50571	Spring
11	50570	Washer
12	50569	Washer
13	50567	Washer
14	51166	Lock Washer
15	41517	Hex Nut
6-15	500452	Rebuild Kit
16	—	Not available as a service part
17	42232	Nozzle
18	52349	Cap
19	34264	O-Ring
20-22	29916	Nut Assembly
23	42228	Supply Tube (26-1/8")
24	52394	Supply Tube (29-5/8")
25	42238	Bracket
26	34453	Screw
27	32966	Screw
28	22911	Flange
29	42236	Bracket
30	34453	Screw
31	42237	Rod
32	30430	Ceramic Valve (closes clockwise)
33	30431	Ceramic Valve (closes counterclockwise)
34	40466	Packing
35	40464	Stem Extension
36	40492	Screw
37	21481	Interlock Hose
38	50572	Nipple
39	34300	O-Ring
40	52350	Plug
41	50480	Shower Face Screw
42	50479	Shower Face Head
43	53189	Shower Head
44	50573	Back Flow Restrictor
45	52202	Washer
46	50477	Ring
47	50476	Outer Tube
48	500451	Handle Assembly
49	56477	Stem Bonnet
50	40451	Packing Nut
51	36652	Bonnet
52	36651	Adapter, Bath
53	36640	Sleeve, Handle Arm
54	36622	Handle Arm Assembly
55	36631	Cap, Center
56	36639	Sleeve, Handle Arm
57	40097	Washer
58	36635	Cap, End

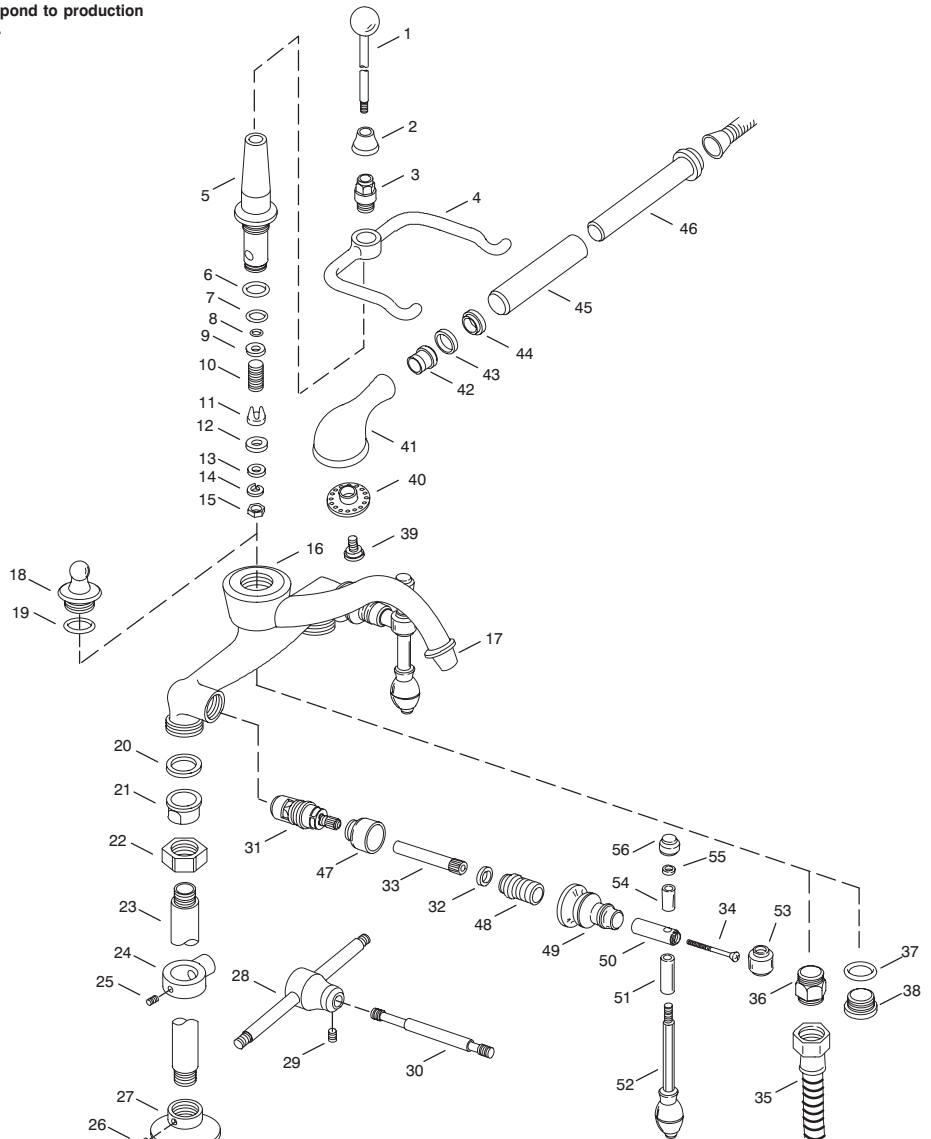

Specify finish on all exposed parts.